


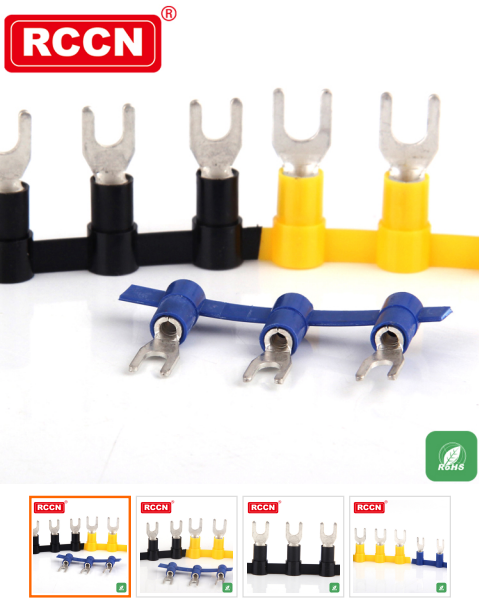

Fork insulated terminal YFN

Series: YFN

Product Material: Terminal made of high quality copper, good conductivity, high quality PA66 coat, durability is not easy to aging.

Features: The use of high-quality matte plating, greatly extended anti-rust time, no sharp parts; supporting the daily terminal clamp can be compressed wire, beautiful wiring


International Certification: EU RoHS environmental certification.

Product Features: Excellent quality, no crack after cracking loose open, -40 degrees heat to 85 degrees normal use, withstanding voltage 600V.

How to use: peel the wire skin, into the terminal after the brass

With terminal with terminal

Specification

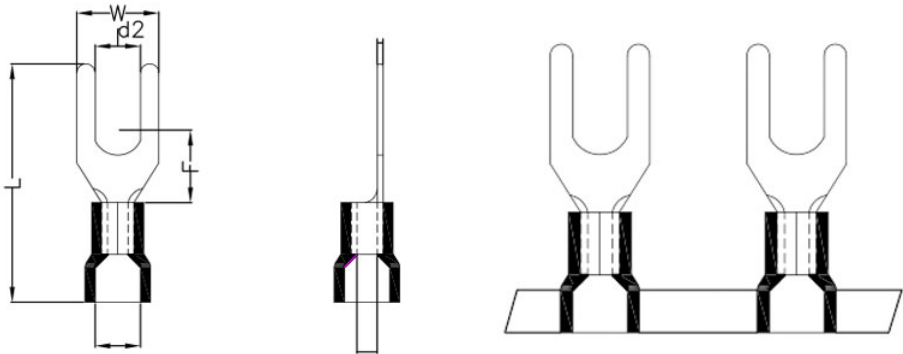

Item No.	DIMENSION				
	USA screw	D2	W	F	L
YF1.25-3N connection	#4	3.2	5.7	6.5	21.2
YFS1.25-3.5N connection	#6	3.7	5.7	6.5	21.2
YFL1.25-3.5N connection	#6	3.7	6.6	6.5	21.2
YFS1.25-4N connection	#8	4.3	8.0	6.5	21.2
YFM1.25-4N connection	#8	4.3	6.6	6.5	21.2
YFL1.25-4N connection	#8	4.3	8.0	6.5	21.2
YFS1.25-5N connection	#10	5.3	8.0	6.5	21.2
YFL1.25-5N connection	#10	5.3	9.8	6.5	21.2
YFS1.25-6N connection	1/4	6.4	9.8	6.5	21.2
YFL1.25-6N connection	1/4	6.4	11.6	11	27.2
YF2-3N connection	#4	3.2	5.7	6.5	21.2
YFS2-3.5N connection	#6	3.7	5.7	6.5	21.2
YFL2-3.5N connection	#6	3.7	6.0	6.5	21.2
YFS2-4N connection	#8	4.3	6.4	6.5	21.2
YFM2-4N connection	#8	4.3	7.2	6.5	21.2
YFL2-4N connection	#8	4.3	8.1	6.5	21.2
YFS2-5N connection	#10	5.3	8.1	6.5	21.2
YFL2-5N connection	#10	5.3	9.5	6.5	21.2
YFS2-6N connection	1/4	6.4	9.5	6.5	21.2
YFL2-6N connection	1/4	6.4	12	11	27.2
YF3.5-3N connection	#4	3.2	5.7	7.0	24.8
YFS3.5-4N connection	#8	4.3	8.0	7.0	24.8
YF3.5-4N connection	#10	5.3	8.0	7.0	24.8

YF3.5-5N connection	1/4	6.4	12	12.1	28
YF3.5-6N connection	#6	3.7	7.2	7.5	24
YFS5.5-4N connection	#8	4.3	8.3	7.5	25.2
YFL5.5-4N connection	#8	4.3	9.0	7.5	25.2
YF5.5-5N connection	#10	5.3	9.0	7.5	25.2
YFS5.5-6N connection	1/4	6.4	9.0	7.5	25.2
YFL5.5-6N connection	1/4	6.4	12	12.0	31.2
YF5.5-8N connection	5/16	8.4	14	11.5	30

Product Show

