



## Wiring harness special terminal 282110-1

### Wiring harness special terminal 282110-1

Material: copper tin

Sealing type: single wire seal

Crimp type: F type crimping

Socket Type: 180 °

Typical rated current: 14A

Docking male end width: 1.5 mm

Butt joint thickness: 0.8 mm

Insulated diameter of wire: 1.7 - 3.3 mm

Temperature range: -40 - 125 ° C

Terminal conduction: 0 - 24 A (low power)






Packing: 4000PCS / roll

Uses: Terminals for cars, trucks, buses and off-highway vehicles



Winding Terminals    Harness Terminals    Terminal Blocks    Crimp Terminals

## Specification

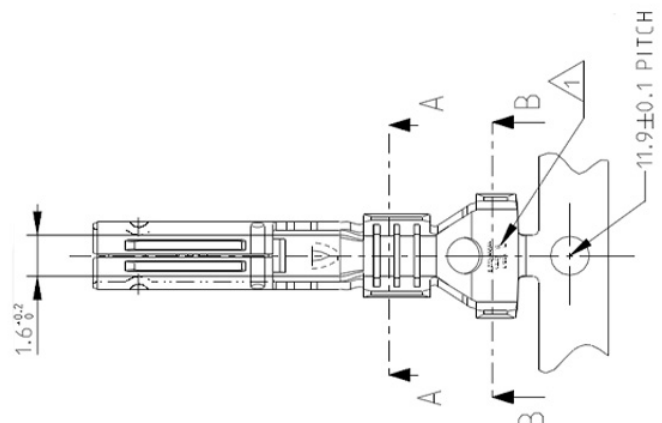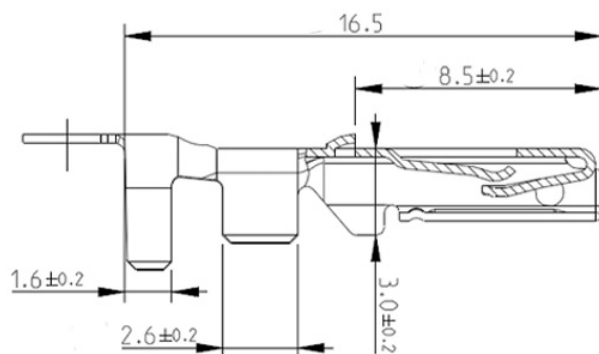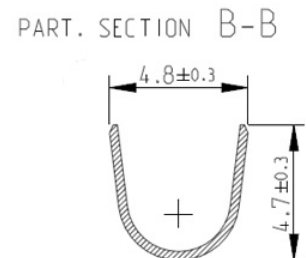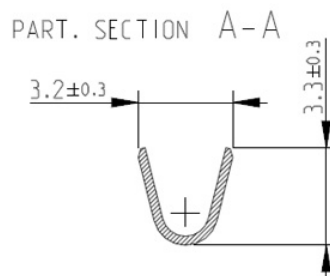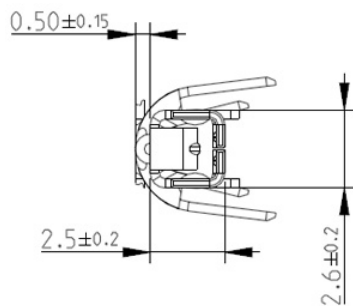

## Product Show

