

RCCN®



Cabinet seal

Material: EPDM or NBR
Substrate: soft rubber
Sealing: foam rubber
Colour: Black
Superior performance: anti-aging, weather resistance, ozone-resistant
Seal: through the self-clamping, sealing effect, but also protect the sharp incision edge; base part made of soft rubber, embedded wire; seal part made of rubber foam.
Can be customized according to installation requirements of various types of seal.

RCCN



RCCN



RCCN




RCCN



Cabinet seal chassis seal power distribution cabinet seal sponge foam tape

Specification

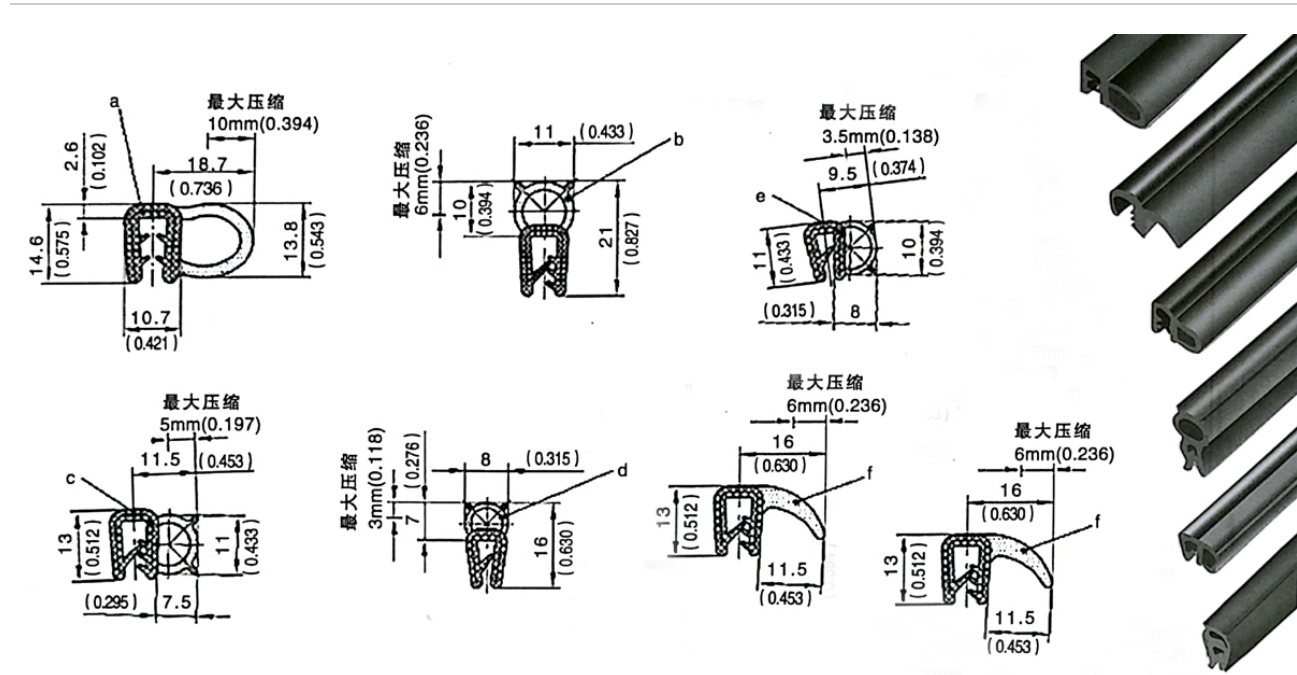

Technical drawings of various cabinet seal profiles (a-f) with dimensions in mm and inches. The drawings show cross-sections of the seals, highlighting their internal structure and dimensions. The dimensions are as follows:

- a: 14.6 (0.575), 2.6 (0.102), 18.7 (0.736), 10.7 (0.421), 13.8 (0.543), 10mm (0.394) maximum compression.
- b: 11 (0.433), 21 (0.827), 10 (0.394), 6mm (0.236) maximum compression.
- c: 13 (0.512), 11.5 (0.453), 7.5 (0.295), 5mm (0.197) maximum compression.
- d: 8 (0.315), 16 (0.630), 7 (0.276), 3mm (0.118) maximum compression.
- e: 9.5 (0.374), 10 (0.394), 11 (0.433), 3.5mm (0.138) maximum compression.
- f: 16 (0.630), 11.5 (0.453), 13 (0.512), 6mm (0.236) maximum compression.

A 3D perspective view of the seals is shown on the right side of the figure.

序号	材质	Colour	Plate thickness	package
a	EPDM Soft / foam rubber	black	1.5-3.0mm	100m
b	EPDM Soft / foam rubber	black	1.5-3.5mm	100m
b1	EPDM Soft / foam rubber	black	0.8-2.0mm	100m
	NBR	black	1.5-3.5mm	100m
c	EPDM Soft / foam rubber	black	1.5-3.5mm	100m
c1	EPDM Soft / foam rubber	black	0.8-2.0mm	100m
	NBR	black	1.5-3.5mm	100m
d	EPDM Soft / foam rubber	black	1.3-2.5mm	100m
d1	EPDM Soft / foam rubber	black	0.8-1.5mm	100m
e	EPDM Soft / foam rubber	black	1.3-2.5mm	100m
e1	EPDM Soft / foam rubber	black	0.8-1.5mm	100m
f	EPDM Soft / foam rubber	black	1.5-3.5mm	100m

Product Show

http://en.rccn.com.cn/content_products_897.html

1/4



